

FOR THE DEALER NEAREST YOU CALL: 1-800-525-0107 www.merrittproducts.com

Builder of High Performance, High Quality Truck Products

Follow us on Facebook!!

- 6 Models to choose from, allowing you to adapt a bracket to your application.
- 3 Adjustable models, giving you greater flexibility.
- All E-Z Fender Mount brackets have the time tested single mounting bolt. Very Quick- Very Easy!
- 3 Straight models available with rubber spacers, which provide 1" clearance between the fender and bracket, allowing dirt and gravel to pass through... makes cleaning easier.
- All hardware is supplied with each bracket for mounting.
- Fender to bracket mounting hardware is made from stainless steel.
- Mounting instructions included with each bracket for installation.
- Stocked in all Merritt warehouse locations.


E-Z MOUNT FENDER BRACKET












E-Z MOUNT FENDER BRACKET ORDER INFORMATION

ADJUSTABLE FENDER BRACKETS




All three E - Z fender brackets are adjustable in length from 27" to 30".

Stainless steel cap screw mounting plate bolts are included.


Installation Notes:

- Backing plate is designed to be used as a template to drill holes in fender.
- ▲ When installing the 3/8" x 2 1/4" bolts, it is recommended that the bolts are not over tightened, 10inch lbs. torque.
- It is necessary to bend TAB Lock-washers downward into the bolt to prevent unwinding.
- ▲ Torque 5/8" nuts to 150 ft/lbs.


E - Z Fender Bracket - Black - 4" Model



E - Z Fender Bracket - Black - 8" Model



E - Z Fender Bracket - Black - 10" Model




STRAIGHT FENDER BRACKETS

This is a Universal Bracket-designed to mount outside any fender.


Features:

- ▲ Mounts solidly to frame with single grade 8 bolt
- ▲ 574 Mounts to the existing stub shaft or the 573 post, making those hard installations easier
- ▲ Bracket Mounts 1" off Fender so rocks and gravel can pass through


Mounting Post - Zinc Plated




Post Mount Bracket - Chrome



Straight Bracket



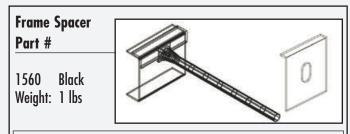

- If your EZ-Mount bracket, mounted in the center and on the fifth wheel plate does not have full contact, the 1560 will allow a fix for this
- Just mount with the "leg" below (see the drawing) the fifth wheel plate and then mount the bracket through the plate making a 100% contact mount for the bracket.
- The 1560 package includes 2 plates, one for each side and instructions on how to use.

Models and/or Specifications Subject to Change Without Notice.

F.O.B. - Fort Lupton CO, Sacramento CA, Salt Lake City UT, Dallas TX, Houston TX, Kansas City MO, Minneapolis MN, Atlanta GA, Pittsburgh PA, Calgary AB (CN), Toronto ON (CN)

